




1	No. of Active Coils	$n = 8.5$	
	Total No. of Coils	$nt = 10.5$	
2	Direction of Coils	right ☒ left ☐	
3	Deburring of Spring Ends	no ☒ inside ☐ outside ☐	
4	Working Path (Stroke)		
5	Stress Cycle Frequency		
6	Range of working temperature	$0 \dots 80 \text{ }^{\circ}\text{C}$	
7	Wire or Rod Surface	drawn ☒ rolled ☐ tipless grinding ☐ spring shot-blasted with steel balls ☐	
8	Surface Protection:		
9	Material:	SH/DH	

10	Permissible Deviations according to EN 15800 Quality Class				DIN 2096
	1	2	3		
	De, Di	☐	☐	☐	☐
	L0	☐	☐	☐	☐
	F1	☐	☐	☐	☐
	F2	☐	☐	☐	☐
	e1	☐	☐	☐	☐
	e2	☐	☐	☐	☐
	d				
11	Manufacturing Tolerance			by:	
	a) if the spring force and the spring length are specified			L0	☐
	b) if the spring force, the spring length and L0 are specified			n and d	☒
				n and De, Di	☐
	c) if two spring forces and the spring lengths are specified			L0, n and d	☐
				L0, n and De, Di	☐
12	Set Test Springs ! Supply remaining springs set ☐ not set ☐				
	Springs to be supplied not set may be longer than L0				

				Date	Name	Feder
				Compl.		
				Check		
				Stand.		
						D-80086
Cond.	Modification	Date	Name	ZILLER Böhmenkirch		

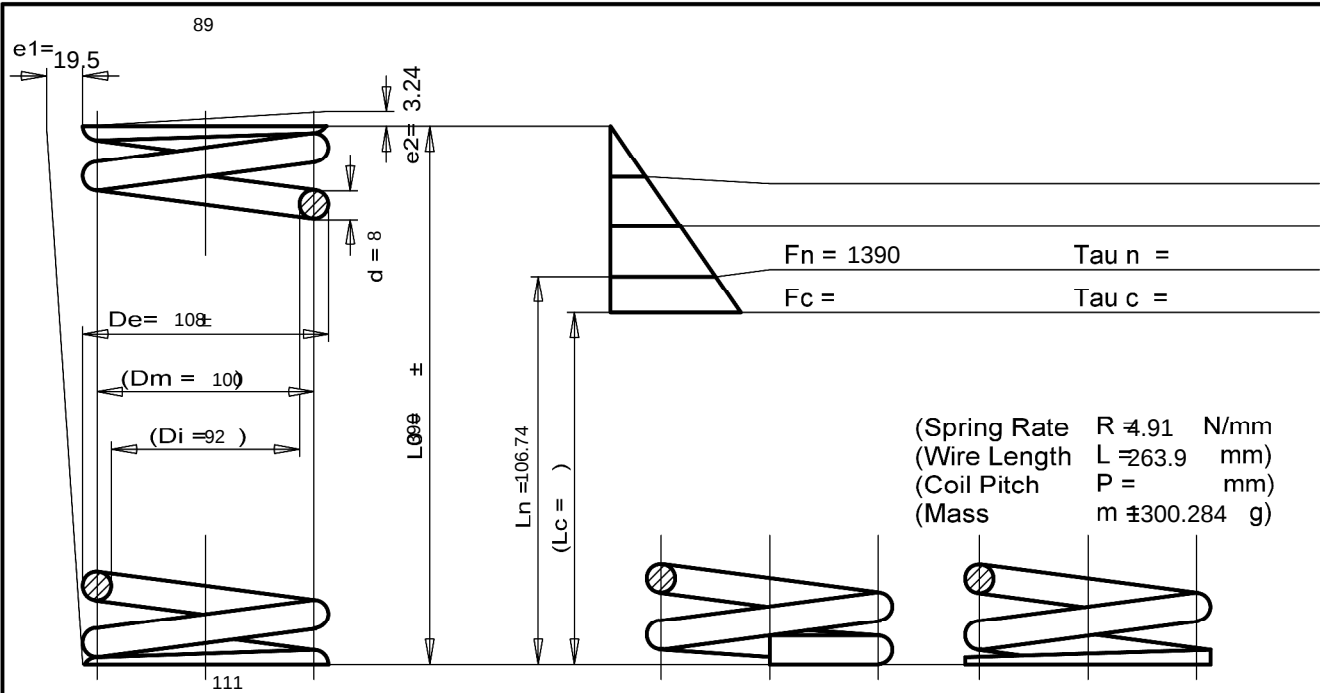